



भारत सरकार
जल संसाधन मंत्रालय
केंद्रीय भूजल बोर्ड

GOVT OF INDIA
MINISTRY OF WATER RESOURCES
CENTRAL GROUND WATER BOARD

महाराष्ट्र राज्य के अंतर्गत गढचीरोली जिले की
भूजल विज्ञान जानकारी

GROUND WATER INFORMATION
GARHCHIROLI DISTRICT
MAHARASHTRA



By
Dibakar Mohanta
Assistant Hydrogeologist

द्वारा
दिबाकर मोहंता
सहाय्यक भूजलवैज्ञानिक

मध्यवर्ती क्षेत्र
नागपुर
CENTRAL REGION
NAGPUR
2010

GARHCHIROLI DISTRICT AT A GLANCE

1. GENERAL INFORMATION

Geographical Area	14915.54 sq. km.
Administrative Divisions (As on 31/03/2007)	: Taluka-12; Desaiganj, Armori, Kurkheda, Korchi, Dhanora, Garhchiroli, Chamorshi, Mulchera, Etapalli, Bhamragad, Aheri, and Sironcha.
Villages	: 1679
Population (2001)	: 10,53,857
Normal Annual Rainfall	: 1300 to 1750 mm

2. GEOMORPHOLOGY

Major Physiographic unit	: 2; Hilly and Plains
Major Drainage	: 3; Wainganga, Indravati and Pranhita all tributaries of Godavari River.

3. LAND USE (2001-02)

Forest Area	: 11329.69 sq. km.
Cultivable Area	: 2403.50sq. km.
Net Area Sown	: 1960.31 sq. km.

4. PRINCIPAL CROPS (2004-05)

Cereals	: 1560 sq. km.
Pulses	: 300 sq. km.
Oil Seeds	: 70 sq. km.

5. IRRIGATION BY DIFFERENT SOURCES (2000-01)-

Nos./Potential Created (ha)

Dugwells	: 9948/14358
Tubewells & Borewells	: 152/440
Tanks & Ponds	: 3925/27207
Other Minor Surface Sources	: 891/3647
Net Irrigated Area	: 36843 ha

6. GROUND WATER MONITORING WELLS (As on 31/05/2007)

Dugwells	: 53
Piezometers	: 3

7. GEOLOGY

Recent	: Alluvium, Soil and Laterite
Upper Gondwana	: Chikiala Stage: Grey to Black, ferruginous Sandstone, ferruginous Conglomerate and Sandstone. : Kota Stage: Ferruginous Conglomerate and Sandstone. Calcareous Sandstone and Limestones.
Lower Gondwana	: Kamthi Stage: Friable, ferruginous, medium to coarse grained Sandstone and ferruginous conglomerate.
Pakhal series of Cuddapahs System (Precambrian)	: Limestone with intercalated Shale, ferruginous Shale, Conglomerates, Breccia, Quartzite and Sandstone.
Archean	: Basic intrusive and Quartz Pegmatite veins, Granite and Pyroxene Gneisses, Pyroxenite banded Magmatite, Quartzite and other unclassified metamorphics

8. HYDROGEOLOGY

Water Bearing Formation	: Soft Rock- Sandstone and Conglomerates of Gondwana, coarse grained sand and colluvium of
-------------------------	--

Alluvium.
Hard Rock- Weathered and Fractured
Granite and Gneisses.

Premonsoon Depth to Water Level : 2.94 to 12.13 m bgl
(May 2007)
Postmonsoon Depth to Water Level : 0.95 to 13.70 m bgl
(Nov. 2007)
Premonsoon Water Level Trend : Rise: Negligible to 0.51 m/year
(1998-2007) Fall: 0.01 to 0.30 m/year
Postmonsoon Water Level Trend : Rise: Negligible to 0.32 m/year
(1998-2007) Fall: Negligible to 0.38 m/year

9. GROUND WATER EXPLORATION (As on 31/03/07)

Wells Drilled : EW-8, OW-3
Depth Range : 80.00 to 300.11 m bgl
Discharge : 1.30 to 15.00 lps

10. GROUND WATER QUALITY

Type of Water : Ca-HCO₃ and Ca-Cl type.

11. DYNAMIC GROUND WATER RESOURCES- (As on 31/03/2004)

Net Annual Ground Water : 1225.42 MCM
Availability
Annual Ground Water Draft : 106.74 MCM
(Irrigation+Domestic)
Allocation for Domestic and : 27.19 MCM
Industrial requirement up to next 25
years
Stage of Ground Water : 8.71 %
Development

12. AWARENESS AND TRAINING ACTIVITY

Mass Awareness Programme (MAP) : One
a. Date : 26/02/2004
b. Place : Ranwahi, Taluka- Kurkheda
c. Participants : 150

13. MAJOR GROUND WATER PROBLEMS AND ISSUES

The water level trends in soft rock formations occurring in southern parts and hard rock areas of central part are showing declining trends. In the district, about 48% samples have nitrate concentration more than MPL and 22.5% water samples have TH concentration more than MPL (>600 mg/L). This indicates that the potability of ground water is mainly affected due to NO₃ and TDS.

Ground Water Information Garhchiroli District

Contents

1.0	Introduction.....	1
2.0	Climate and Rainfall	3
3.0	Geomorphology	3
4.0	Ground Water Scenario	4
4.1	Hydrogeology	4
4.2	Yield of Wells.....	9
4.3	Aquifer Parameters.....	10
4.4	Ground Water Resources.....	10
4.5	Ground Water Quality	12
4.6	Status of Ground Water Development	15
5.0	Ground Water Management Strategy	15
5.1	Ground Water Development.....	15
5.2	Water Conservation and Artificial Recharge	16
6.0	Ground Water Related Issues and Problems.....	16
7.0	Mass Awareness and Training Activities	16
7.1	M.A.P. and W.M.T.P.....	16
8.0	Areas Notified by CGWA/SGWA	17
9.0	Recommendations.....	17

List of Figures

1. Location.
2. Hydrogeology
3. Premonsoon Depth to Water Level (May 2007).
4. Postmonsoon Depth to Water Level (Nov. 2007).
5. Premonsoon Water Level Trend (May 1998-2007).
6. Ground Water Resources (March 2004)

List of Tables

1. Studies undertaken by CGWB (March 2007).
2. Salient Features of Ground Water Exploration (March 2007).
3. Annual Rainfall Data (2002-2007).
4. Yield of Wells.
5. Ground Water Resources (March 2004).
6. Geochemical Classification of Ground Water Samples (May 2007).
7. Classification of Ground Water Samples based on BIS Drinking Water Standards (IS-10500-91, Revised 2003), (May 2007).
8. Classification of Ground Water for Irrigation based on SAR and RSC (May 2007).
9. Status of MAP & WMTP (March 2007).

Ground Water Information

Garhchiroli District

1.0 Introduction

Garhchiroli district is one of the eleven districts of Vidarbha region of Maharashtra. The district is bounded on the east by Chattishgarh State, on the south Andhra Pradesh State, on the north as Gondia district, and on the west by Chandrapur district. Garhchiroli district was created on August 26, 1982 by bifurcating Chandrapur district. It lies between north latitudes 18°08' and 20°50' and east longitude 79°45' and 80°54' and falls in parts of Survey of India degree sheets 55 P, 56 M, 56 N, 64 D, 65 A and 65 B. The district has a geographical area of 14915.54 sq. km.

The district headquarters is located at Garhchiroli Town. For administrative convenience, the district is divided in 12 talukas viz., Desaiganj, Armori, Kurkheda, Korchi, Dhanora, Garhchiroli, Chamorshi, Mulchera, Etapalli, Bhamragad, Aheri and Sironcha. As per 2001 census it has a population of 10,53, 857 and 1679 villages. There are three major rivers flowing in the district i.e., Wainganga, Indravati and Pranhita and all are tributaries of Godavari River.

Central Ground Water Board has taken up several studies in the district. A list of studies conducted in the district is presented in **Table-1**.

Table 1: Studies undertaken by CGWB (March 2007).

S. No.	Officer (S/Shri)	AAP	Type of Survey/Study	Areal Covered
1.	Sudarshana	1976-77	SHS	56 N/13, 65 B/1 & 56 B/2
2.	Nagarjan R.	1977-78	SHS	56 M/16, 65 A/4 & 65 A/8.
3.	MurthyK.N.	1986-87	SHS	56 M/13, & M/14
4.	Sudarshan G.	1988-89	SHS	56 M/15, 65 A/3, 65 A/7, 65 A/11, 65 A/14 & 65 A/15.
5.	Marwaha S.	1988-89	SHS	65 A/1, 65 A/2, 65 A/5, 65 A/6, 65 A/9 & 65 A/10.
6.	Arumugam K.	1988-89	SHS	64 D/4, 64 D/7, 64 D/8, 64 D/11 & 64 D/12.
7.	Jain P.K & Bhattacharya	1990-91	SHS	55 P/14
8.	Naik P.K.	1990-91	SHS	55P/15 & 55P/16.
9.	Binoy Ranjan	1993-94	RHS	Chamorshi and Ashti talukas

Here, SHS- Systematic Hydrogeological Survey, RHS- Reappraisal Hydrogeological Study.

In addition to the above studies, a report entitled "Ground Water Resources and Development Potential of Garhchiroli District, M.S." was compiled by Shri. L.M. Motghare, Scientist- C, in 1993-94. A map of the district showing taluka boundaries, taluka headquarters, physical features and locations of monitoring wells and Piezometers is presented in **Figure-1**.

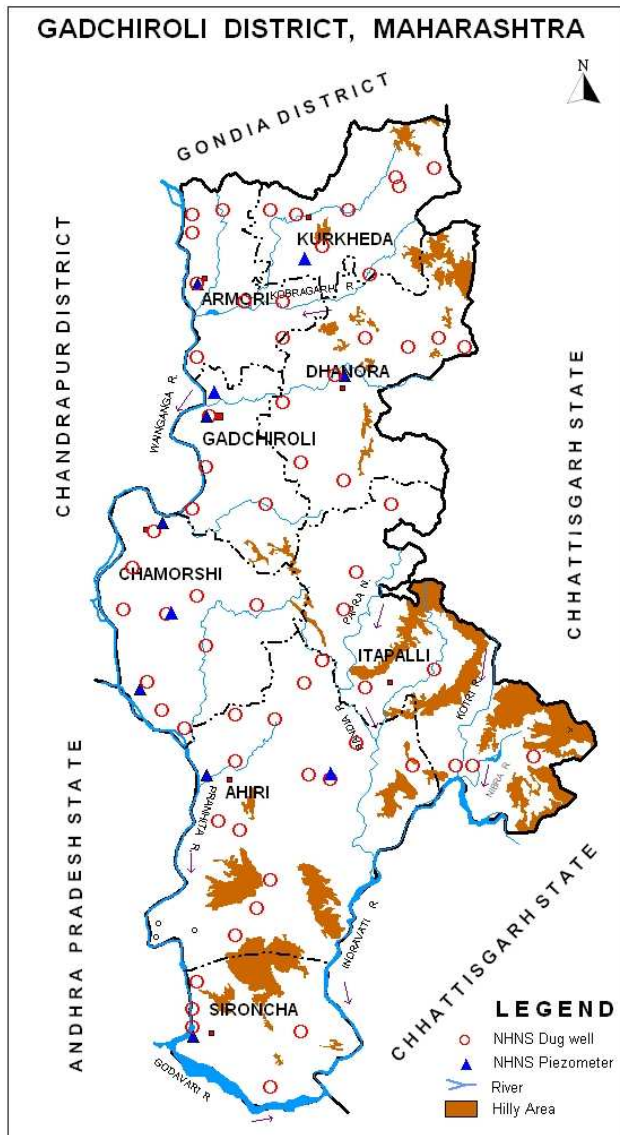


Figure-1: Location.

The ground water exploration in the district has been taken up in 1984. The ground water exploration has been done in Gondwana Sandstone. A total of 8 EW and 3 OW have been constructed till March 2007.

Table 2: Salient Features of Ground Water Exploration (March 2007).

Taluka	Total Wells	Wells			Depth (m bgl)	Casing (m bgl)	SWL (m bgl)	Dis-charge (lps)	Draw-down (m)	Zones (m bgl)
		EW	OW	PZ						
Sironcha	11	8	3	-	80.00-300.15	30.00-178.00	1.65-19.10	1.30-15.00	10.00-29.05	5.30-276.52

In Gondwana Sandstone 8 exploratory wells and 3 observation wells were drilled and their depth ranged from 80.00 to 300.15 metres below ground level (m bgl). The discharge from these wells varied from 1.30 to 15.00 litres per second (lps), for a drawdown of 10.00 to 29.05 m. Static water levels ranged from 1.65

to 19.10 m bgl. The potential aquifer zones have been encountered from 5.30 to 276.52 m depth. These wells tap Kota and Chikiala, Sandstones of upper Gondwana and lower Gondwana sediments. Two main aquifer zones were encountered viz., one between 30 and 100 m bgl and another between 160 and 230 m bgl. The exploration results reveal that the depth to basement ranges from 123 to 176 m bgl in the central and north-western parts of Sironcha taluka, whereas it is more that 300 m in the western and southern parts. The results of the exploration indicate the scope for development of ground water by means of tubewells mainly for irrigation purposes. The depth of tubewells should be between 80 and 120 m bgl.

2.0 Climate and Rainfall

The climate of the district is characterized by a hot summer, a well distributed rainfall during the southwest monsoon and general dryness except during rainy season. The winter is from December to February followed by summer from March to May. The southwest monsoon season is from June to September. October and November constitute the post-monsoon. The mean minimum temperature is 14.6°C and mean maximum temperature is 42.1°C.

The normal annual rainfall over the district varies from about 1300 mm to 1750 mm. The average annual rainfall for the period 2002-2007 ranges from 846.42 mm (Chamorshi) to 1738.28 mm (Kurkheda), whereas year wise data suggests that minimum rainfall was in 2002 (962.20 mm) and maximum was in 2007 (1704.33 mm). The overall average annual rainfall for last 6 years is 1374.24 mm and is presented in **Table-3**.

Table 3: Annual Rainfall Data (2002-2007) (mm).

Sr. No.	Name of Taluka	Rainfall (mm)						Average (mm)
		2002	2003	2004	2005	2006	2007	
1	Garhchiroli	1022.40	1286.10	1200.20	1490.60	1421.00	1619.00	1339.88
2	Dhanora	1285.10	1740.70	1315.00	1682.80	1564.90	1874.90	1577.23
3	Chamorshi	601.50	808.50	768.50	1039.00	1054.00	807.00	846.42
4	Mulchera	756.20	1564.40	1316.00	1518.60	1368.00	1377.20	1316.73
5	Wadsa	1036.80	1416.40	911.00	1513.80	1494.80	2298.80	1445.27
6	Armori	963.80	1184.80	733.40	1349.80	1598.40	1551.40	1230.27
7	Kurkheda	1199.60	1120.80	1116.20	2228.60	1694.00	3070.50	1738.28
8	Korchi	972.20	1344.00	1713.20	2920.70	1554.00	1623.00	1687.85
9	Aheri	818.00	1520.00	854.00	1326.00	1258.40	1542.70	1219.85
10	Sironcha	932.20	1201.00	546.90	1225.20	1701.60	1141.20	1124.68
11	Etapalli	790.00	1514.00	1102.40	1592.30	1481.40	1427.80	1317.98
12	Bhamragad	1169.30	2222.50	1179.90	2037.00	1151.60	2118.40	1646.45
	Average	962.26	1410.27	1063.06	1660.37	1445.18	1704.33	1374.24

(Source- Collectorate, Garhchiroli)

3.0 Geomorphology

Topographically, the major part of the district is undulating. The area around Godavari River and the Pranhita is the plain. The area towards the south of the Godavari is low lying having an elevation of about 160 m amsl. Central part of the district is also low lying having an elevation of around 250 m amsl. The elevation in the district ranges from 160-935 m amsl. The hill ranges of the district comprises of Sirkheda, Bhamragarh, Aheri, and Dandakaranya. Sirkoda hill

range is about 25 km wide and extends over a distance of about 70 km.

There are three major rivers flowing in the district i.e., Wainganga, Indravati and Pranhita, all are tributaries of Godavari River.

4.0 Ground Water Scenario

4.1 Hydrogeology

The district is unique in Maharashtra in the sense that the entire area of the district is mainly occupied by metamorphic and igneous rocks along with sedimentary rocks in southern part. The district is underlain by various types of rock formations from the oldest Granites and Gneiss of the Precambrian to the Recent Alluvium. A map depicting the hydrogeological features is shown in **Figure-2**.

The occurrence and movement of ground water depends upon the rock formation of the area. It is generally influenced by the following factors.

- Inter-granular primary porosity and permeability.
- Thickness and extent of weathered zones.
- Topographic setting of an area.
- Surface water bodies influencing ground water recharge.
- Development of joints, fractures, lineaments constituting secondary porosity and permeability.

Formation wise water bearing properties and its potential in Garhchiroli district is described as follows.

4.1.1 Hard Rock Formation

4.1.1.1 Archeans

Archeans consisting of granite gneisses, schist, etc. occupies a major part of the district. These un-weathered rocks do not have inter granular porosity and permeability. Occurrence of ground water in this formation is controlled by the degree of weathering, jointing and fracturing. These rocks cover an area of about 12470 sq.km. i.e., about 81% of the total area of the district in the entire northern, eastern, western and central parts. These crystalline rocks due to prolonged weathering has produced layer of unconsolidated saprolite material which forms favourable and important source of ground water. The thickness of weathering varies considerably and at times it is more than 20 m. The weathering in coarse grained hard rocks imparts good porosity and permeability and the ground water structures constructed in these rocks give good yields. Laterite is commonly found as capping the weathered rocks at some places. These Laterites have generally low permeability and tends to impede infiltration. The ground water abstraction structures constructed in these rocks have poor yields.

Un-weathered rock underlain by the weathered zones, jointed and fractured zones forms good aquifers. The ground water storage relies entirely on secondary porosity and permeability in these rocks. High yields are generally associated with the presence of fractured and other secondary openings. Ground water occurs in unconfined and confined conditions in this formation.

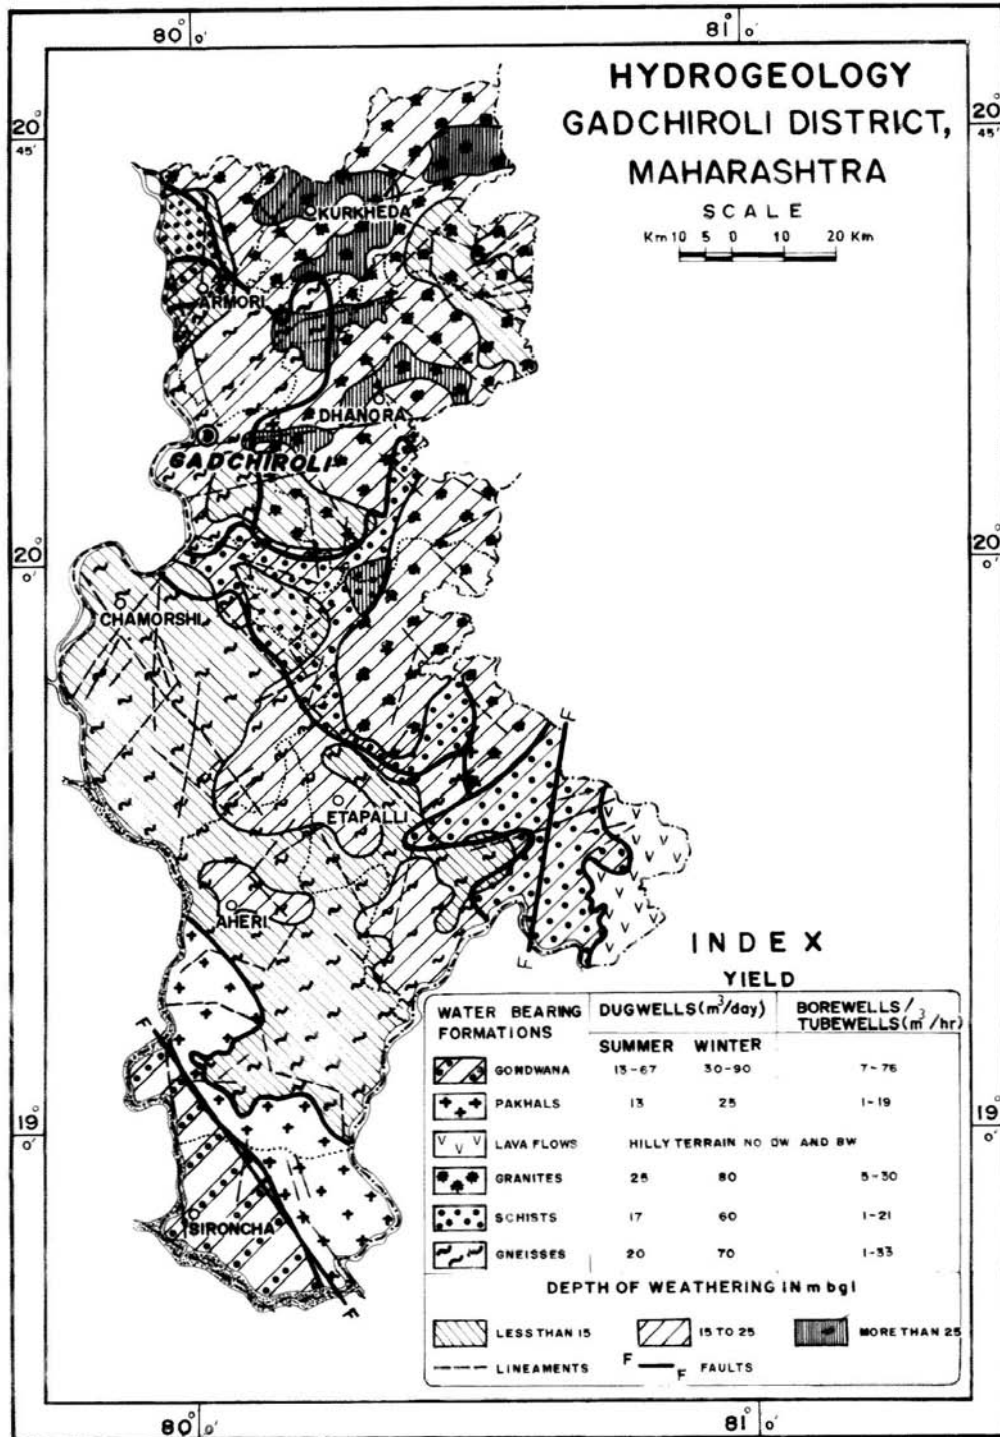


Figure-2: Hydrogeology

4.1.1.2 Deccan Trap Basalt

The Deccan Trap Basalt is observed in eastern peripheral parts of the district. These flows occur in layered sequence and they are represented by massive portion at bottom and vesicular portion at top and are separated from each other by marker bed known as bole bed. However as this formation occurs entirely in the hilly areas of the district, it is not suitable for ground water

development.

4.1.1.3 Pre-Cambrian

The Pre-Cambrian formation belonging to Pakhals occupy the south and south-western part of the district covering an area of about 820 sq.km They are composed of Limestone, Shales, Conglomerates, Breccias, Quartzite and Sandstones. These argillaceous sedimentary rocks are inter-bedded with Shales and Clays. Sandstones and Conglomerates have inter-granular porosity. Joints and fractures in these rocks impart additional secondary porosity and permeability forming good aquifers. Ground water occurs in unconfined and confined conditions in these formations. Limestone's and Dolomite of Cuddapahs form good aquifers at places in northern part of the district. They show karstification around Bugga Gutta SE of Umanur. They show promising potential of ground water.

4.1.2 Soft Rock Formation

4.1.2.1 Gondwana

An area of about 740 sq.km. is covered by the Gondwana formation constituting Kamthis, Kota and Chikiala stages in the southern part of the district along the banks of Pranhita and Godavari rivers in a narrow trough. They form the best aquifers in the area. They are composed of Sandstones, Shales and Conglomerates. The Sandstones and Conglomerates of this formation have good primary porosity and permeability. The Chikiala group of rocks generally occupy flat topped hills and ridges and forms ideal recharge areas. Due to variation of permeability between different stages at number of localities springs can be seen especially between Kota and Chikiala stages. The Kota group of rocks generally occupies intermediate and discharge areas.

Kamthi Sandstone forms the best aquifers in the area. The thickness of the Kamthis in the district is more than 300 m as observed from the exploratory drilling programme carried out by Central Ground Water Board. Along the contacts of Kamthi and Kota formations numerous springs have also been reported. Ground water occurs in semi-confined to confined conditions in these formations.

In the south-western parts of Sironcha taluka, Limestones of Kota stage are found. Ground water occurs both under confined and unconfined conditions. Aquifers are formed in these rocks due to solution cavities and fractures at places.

4.1.2.2 Alluvium

Alluvium occurs over a small area of about 10 sq.km. along the banks of major rivers. It consists of sand, gravel, silt, clay and kankar. The thickness of alluvium deposits is very limited and is generally within 30 m. At places alluvium is underlain by colluvium having a thickness varying from 1 to 8 m. Coarse grained sand and colluvium forms very good aquifers. Ground water occurs under semi-confined to confined conditions.

4.1.3 Water Level Scenario

Central Ground Water Board periodically monitors 55 National Hydrograph Network Stations (NHNS) (52 dugwells and 3 Piezometers) in the district, four

times a year i.e. in January, May (Premonsoon), August and November (Postmonsoon).

4.1.3.1 Premonsoon Depth to Water Level (May-2007)

The depth to water levels in the district during May 2007 ranges between 2.94 (Khondala) and 15.88 (Sironcha) m bgl. Depth to water levels during premonsoon (May 2007) has been depicted in **Figure-3**. Shallow water levels, within 5 m bgl are seen in small patch in northwestern part of the district in Armori taluka, whereas moderate water level in the range of 5 to 10 m bgl are seen in almost entire district except 2 to 3 patches where water level of 10 to 20 m bgl are observed in parts of Itapalli taluka and Sironcha talukas.

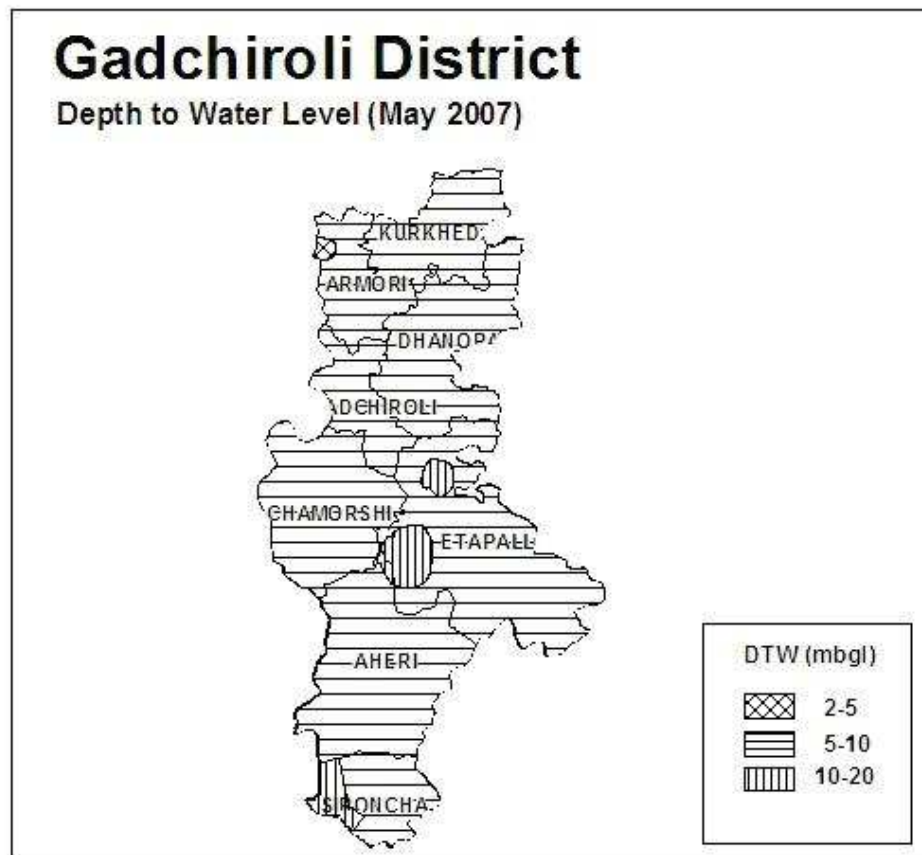


Figure 4- Premonsoon Depth to Water Level (May 2007)

4.1.4 Postmonsoon Depth to Water Level (Nov.-2007)

The depth to water levels during postmonsoon (Nov. 2007) ranges between 0.95 m bgl (Garhchiroli) and 13.70 m bgl (Sironcha). Spatial variation in postmonsoon depth to water levels is shown in **Figure-4**. Shallow water levels within 5 m bgl are observed in northern and central parts of the almost Garhchiroli district. The moderate water level of 5 to 10 m bgl and observed in south eastern parts of the district. The deeper water levels between 10 and 20 m bgl are observed around Sironcha.

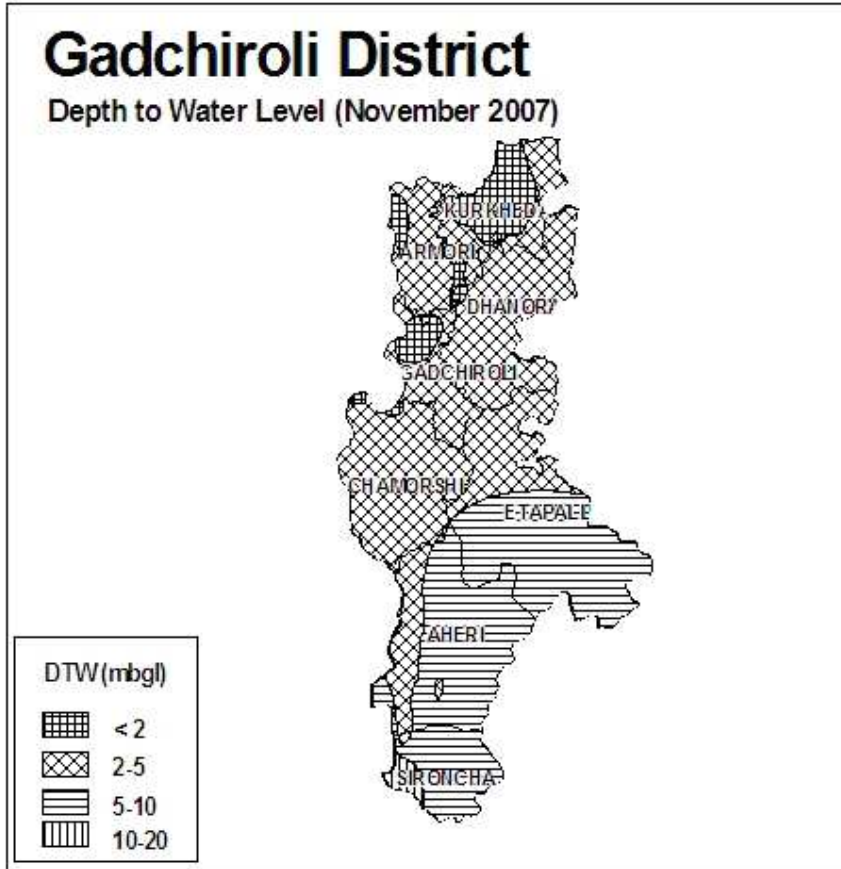


Figure-4: Postmonsoon Depth to Water Level (Nov. 2007)

4.1.5 Seasonal Water Level Fluctuation (May-Nov. 2007)

In entire district rise in water level fluctuation in the range of 1.44 (Khandala) to 7.13 m (Armori) is observed, whereas fall is observed only at 2 places, most probably due to local situation. The fluctuation of 0 to 2 m is observed in southern parts of the district, whereas 2 to 4 m fluctuation is observed in central-southern parts of the district. The fluctuation of more than 4 m is observed in northern parts of the district.

4.1.6 Water Level Trend (1998-2007)

Trend of water levels for pre-monsoon and post-monsoon periods for last ten years (1998-2007) have been computed for 52 NHNS.

Analysis of trend indicates that during premonsoon period, rise in water levels has been recorded at 27 stations and it ranges between negligible and 0.51 m/year (Sironcha). Fall in water levels has been observed at 25 stations and ranges between 0.01 (Chaudampalli) and 0.30 m/year (Todsia Tola). During postmonsoon period, rise in water levels has been recorded at 18 stations and it ranges from negligible to 0.32 m/year (Purada), whereas at 34 stations, fall in water levels ranging between negligible (pirimili) and 0.38 m/year (Todsia Tola) is observed. Thus in major part of the district, both during pre and postmonsoon periods declining trends have been observed. The premonsoon trend map was also prepared and the same is presented in **Figure-5**.

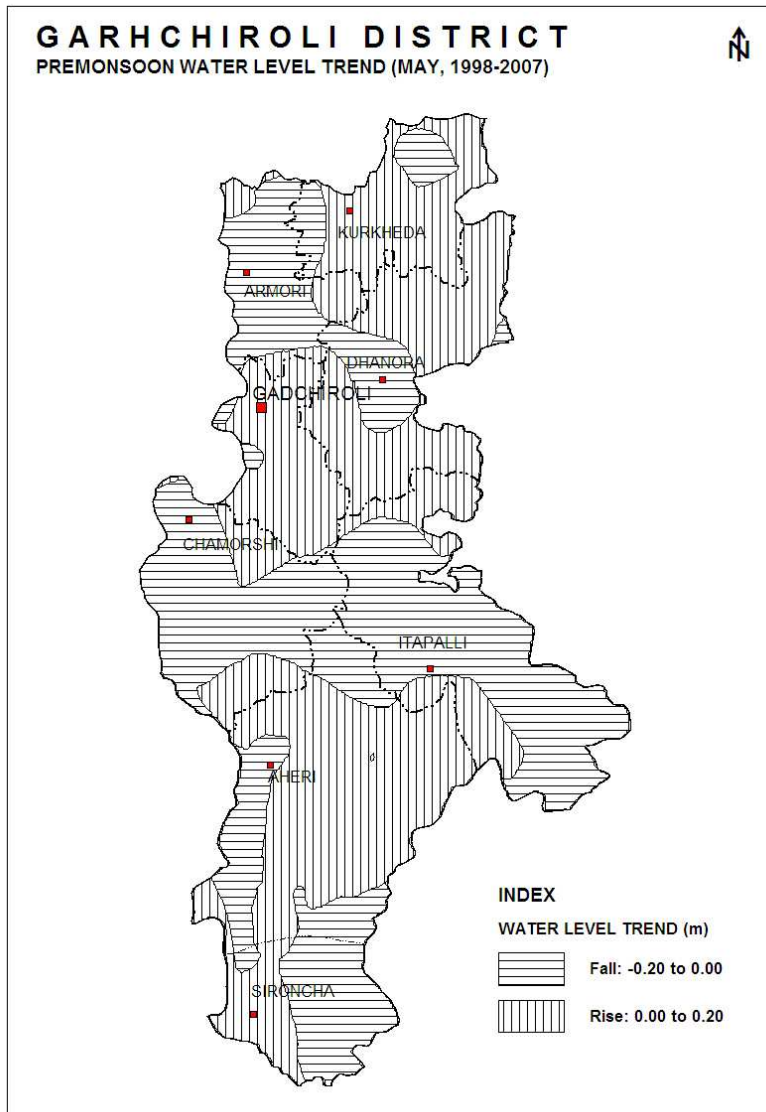


Figure-5: Premonsoon Water Level Trend (1998-2007).

It shows that rise and fall in water level trend are almost equally distributed. The rise of up to 20 cm/year is observed in southern-central, north-central and north eastern parts of the district. The fall of up to 20 cm/year is observed north western, central and south eastern parts of the district occupying almost entire Itapalli, Chamorshi and Armori talukas and parts of Dhanora, Aheri and Sironcha talukas. Thus, the future water conservation and artificial recharge structures needs to be prioritised in these areas.

4.2 Yield of Wells

The yields of wells are functions of the permeability and transmissivity of aquifer encountered and vary with location, diameter and depth etc. Ground water in the area is being developed by three type of abstraction structures i.e., dugwells, borewells and tubewells. However dugwells are the main ground water abstraction structures in the district for both domestic and irrigation use. High yielding dugwells are generally located in sandstones and conglomerates of Gondwana, coarse grained sand and colluvium of Alluvium also form potential

aquifer although its occurrence is limited to bank of major rivers. In the hard rock formations like granite and gneisses, when weathered and fractured occurring in physiographic depressions, have also good yield. The yield of wells in different types of formations encountered in the district is presented in **Table-4**.

Table-4: Yield of Wells.

S. No	Water Bearing Formations	Yield		
		Dugwells (m ³ /day)		Borewells/Tubewells (m ³ /hr)
		Summer	Winter	
1	Alluvium	-	40-135	-
2	Gondwana	13-67	30-90	7-76
3	Pakhals	13	25	1-19
4	Deccan Trap Basalt	Hilly Terrain No Dugwells and Borewells		
5	Granites	25	80	5-30
6	Schist's	17	60	1-21
7	Gneisses	20	70	1-33

4.3 Aquifer Parameters

Based on pumping tests conducted on exploratory wells, it was observed that in Sandstone of Gondwana formation the transmissivity ranges from 1.99 to 99.14 m²/day and the storativity ranges from 1.5 x 10⁻³ to 8.8 x 10⁻⁴. The specific capacity ranges from 0.08 to 3.02 lps/m of drawdown, whereas the permeability was of the order of 200 m/day.

4.4 Ground Water Resources

Central Ground Water Board and Groundwater Survey and Development Agency (GSDA) have jointly estimated the ground water resources of Garhchiroli district as per information as on March 2004 and based on GEC-97 methodology. The same is presented in **Table-5**. Ground water resources estimation was carried out for 886649.10 Ha area out of which 22679.71 Ha is under command and 863969.39 Ha is non-command.

As per the estimation the total annual ground water recharge is 1315.13 MCM with the natural discharge is 89.71 MCM, thus the net annual ground water availability comes to be 1225.42 MCM. The total annual gross draft for all uses is estimated at 106.73 MCM with irrigation sector being the major consumer having a annual draft of 93.01 MCM. The domestic and industrial allocation is worked at 27.19 MCM/year for the next 25 years. The net annual ground water availability for future irrigation is estimated at 1091.49 MCM. Stage of ground water development varies from 1.64% (Wadsa) to 26.46% (Korchi). The overall stage of ground water development for the district is 8.71% and all the talukas have been categorised as "Safe". Similarly, ground water resources were also assessed for 83 watersheds, out of which 81 have been categorised as "Safe", and 2 watersheds (WGG 3 and IPNR-0) have been categorised as "Semi Critical".

Table 5:-Talukawise Ground Water Resources of Garhchiroli District, Maharashtra. (March 2004)

Taluka	Area type	Net annual ground water availability (ham/yr.)	Annual ground water draft (ham/yr.)			Allocation for domestic & industrial requirement supply up to next 25 years (ham/yr.)	Ground water availability for future irrigation (ham/yr.)	Stage of ground water development (%)	Category
			Irrigation	Domestic & industrial uses	Total				
Garhchiroli	NC	5198.61	641.65	140.68	782.33	281.35	4134.93	15.05	Safe
Armori	C	9251.15	48.86	14.62	63.48	20.02	5957.97	0.69	Safe
	NC	5371.72	823.15	108.87	932.02	226.98	7423.85	17.35	
	Total	14622.87	872.01	123.49	995.51	246.99	13381.83	6.81	
Chamorshi	C	3589.83	321.79	50.51	372.30	29.10	1020.67	10.37	Safe
	NC	10590.28	649.03	152.19	801.22	376.31	11580.52	7.57	
	Total	14180.11	970.82	202.70	1173.52	405.40	12601.19	8.28	
Dhanora	NC	7619.62	1007.92	152.65	1160.56	305.30	6153.76	15.23	Safe
Kurkheda	NC	7350.46	1493.12	112.56	1605.69	225.13	5519.65	21.84	Safe
Soroncha	NC	7580.07	976.31	85.92	1062.23	171.83	6346.01	14.01	Safe
Aheri	NC	9553.38	543.04	138.11	681.15	276.42	8631.41	7.13	Safe
Etapalli	NC	10598.96	792.81	131.33	924.14	262.66	9412.16	8.72	Safe
Wadsa	C	29578.65	149.09	47.16	196.26	75.58	22784.31	0.66	Safe
	NC	2335.64	278.14	48.12	326.26	114.99	8415.44	13.97	
	Total	31914.29	427.23	95.29	522.52	190.57	31199.75	1.64	
Mulchera	C	701.06	36.23	1.94	38.17	0.40	22.47	5.44	Safe
	NC	6143.81	529.13	67.01	596.14	137.30	6014.81	9.70	
	Total	6844.87	565.36	68.95	634.30	137.70	6037.28	9.27	
Korchi	NC	3481.24	846.24	74.97	921.21	133.67	2426.36	26.46	Safe
Bhamragad	NC	3597.09	165.22	45.19	210.41	82.43	3304.25	5.85	Safe
District total	C	43120.69	555.97	114.24	670.21	125.09	29785.42	1.55	
	NC	79420.87	8745.76	1257.60	10003.36	2594.35	79363.14	12.60	
	Total	122541.56	9301.72	1371.84	10673.56	2719.44	109148.56	8.71	

Here C-Command, NC-Non Command.

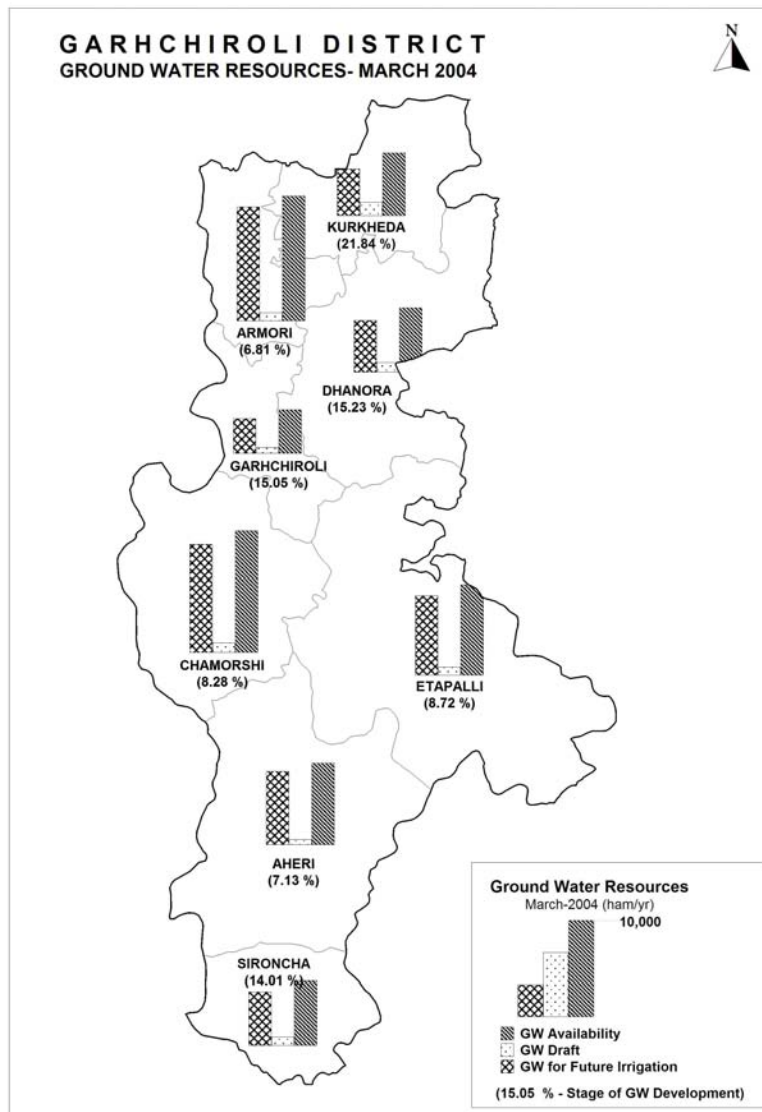


Figure-5: Ground Water Resources (March 2004)

4.5 Ground Water Quality

Central Ground Water Board is monitoring the ground water quality of the district through its National Hydrograph Network Stations (NHNS). The objective behind the monitoring is to develop an overall picture of the ground water quality in the district.

During the year 2007, CGWB carried out the ground water quality monitoring of 40 network stations, which mainly consist of dugwells representing shallow aquifer. The sampling of ground water was carried out in the month of May (Pre-monsoon period). The samples after collection were immediately subjected for the analysis of various parameters in the Regional Chemical Laboratory of the Board at Nagpur. The parameters analyzed include hydrogen ion concentration (pH), electrical conductivity (EC), total dissolved solids (TDS), total hardness (TH), calcium (Ca), magnesium (Mg), sodium (Na), potassium (K), carbonate (CO₃), bicarbonate (HCO₃), chloride

(Cl), sulphate (SO₄), nitrate (NO₃) and fluoride (F). The geochemical classification of ground water samples is given in **Table-6**.

Table-6: Geochemical Classifications of Ground Water Samples (May 2007).

S. No.	Classification	Type	No. of Sample	% of Sample
1	Alkaline earths (Ca +Mg > 50%) exceeds alkali metals and strong acids (Cl+SO ₄ +NO ₃ > 50%) exceeds weak acids.	Ca-Cl	8	20
2	Alkaline earths (Ca +Mg > 50%) exceeds alkali metals and weak acids (CO ₃ +HCO ₃ > 50%) exceeds strong acids.	Ca-HCO ₃	24	60
3	Alkaline earths (Ca +Mg = 50%), Alkali metal (Na +K = 50%), Strong acids (Cl+SO ₄ +NO ₃ = 50%), and weak acids (CO ₃ +HCO ₃ = 50%).	Mixed Type	8	20
	Total		40	100

The geochemical classification shows that 8 samples are having Ca-Cl type of water and 24 samples are of Ca- HCO₃ type and 8 samples were of mixed type of water. Thus indicating that in majority of the samples (60%) the type of ground water is Ca-HCO₃ type.

4.5.1 Suitability of Ground Water for Drinking Purpose

The suitability of ground water for drinking purpose is determined keeping in view the effects of various chemical constituents in water on the biological system of human being. Though many ions are very essential for the growth of human, but when present in excess, have an adverse effect on human body. The standards proposed by the Bureau of Indian Standards (BIS) for drinking water (IS-10500-91, Revised 2003) were used to decide the suitability of ground water. The classification of ground water samples was carried out based on the desirable and maximum permissible limits for the parameters viz., TDS, TH, Ca, Mg, Cl, SO₄ and NO₃ prescribed in the standards and is given in **Table-7**.

Table-7: Classification of Ground Water Samples for Drinking based on BIS Drinking Water Standards (IS-10500-91, Revised 2003), (May 2007).

Parameters	DL	MPL	Samples with conc. < DL	Samples with conc. in DL-MPL	Samples with conc. >MPL
TDS (mg/L)	500	2000	24	16	0
TH (mg/L)	300	600	25	9	6
Ca (mg/L)	75	200	27	13	0
Mg (mg/L)	30	100	22	15	3
Cl (mg/L)	250	1000	36	4	0
SO ₄ (mg/L)	200	400	39	1	0
NO ₃ (mg/L)	45	No relaxation	21	0	19
F (mg/L)	1.0	1.5	39	1	0

(Here, DL- Desirable Limit, MPL- Maximum Permissible Limit)

The perusal **Table-7** shows that out of the 40 ground water samples , 6 samples (22.5%) have TH concentration more than MPL (>600 mg/L), 3 samples (7.5 %) have Mg concentration more than MPL (>100 mg/L). In 19 samples (48%) of samples the nitrate concentration is more than permissible limit. This indicates that the potability of ground water is mainly affected due to NO₃ and TH.

4.5.2 Suitability of Ground Water for Irrigation Purpose

The water used for irrigation is an important factor in productivity of crop, its yield and quality of irrigated crops. The quality of irrigation water depends primarily on the presence of dissolved salts and their concentrations. Sodium Absorption Ratio (SAR) and Residual Sodium Carbonate (RSC) are the most important quality criteria, which influence the water quality and its suitability for irrigation.

4.5.2.1 Sodium Absorption Ratio (SAR)

Sodium Absorption Ratio (SAR) is an expression pertaining to cation make up of water and soil solution and is used for characterising the sodium hazard of irrigation water.

SAR value is used to calculate the degree to which irrigation water tends to enter into cation exchange section in the soil. The main problem with high sodium concentration is its effect on soil permeability. Sodium also contributes directly to the total salinity of the water and may be toxic to sensitive crops such as fruit trees. The higher value of SAR indicates soil structure damage.

4.5.2.2 Residual Sodium Carbonate (RSC)

Residual Sodium Carbonate (RSC) is considered to be superior to SAR as a measure of sodicity particularly at low salinity levels. The classification of ground water samples based on SAR and RSC values for its suitability for irrigation purpose is shown below in **Table-8**.

Table-8: Classification of Ground Water for Irrigation based on SAR and RSC (May 2007).

SAR	<10		10-18		18-26		>26	
Category	Good		Good to Permissible		Doubtful		Unsuitable	
Total Samples	No. of Samples	%	No. of Samples	%	No. of Samples	%	No. of Samples	%
40	40	100	-	-	-	-	-	-
RSC	<1.25		1.25-2.50		>2.50			
Category	Good		Doubtful		Unsuitable			
Total Samples	No. of Samples	%	No. of Samples	%	No. of Samples		%	
40	40	100	-	-	-		-	

The perusal of **Table-8** shows that the ground water samples from all the wells have SAR values less than 10. Similarly, RSC values of all the samples are also below 1.25. Overall, the ground water quality in the wells

monitored is good for irrigation purpose and there is a less possibility of developing sodium hazard.

4.6 Status of Ground Water Development

Ground water development depends on many factors viz., availability, crop water requirement, socio-economic fabric and on the yield of the aquifers existing in that area.

Ground water is predominantly used for irrigation, as it is the major ground water utilising sector. As per the data available (Minor Irrigation census, 2000-01) indicates that area irrigated by ground water is 86.12 sq. km, whereas area irrigated by surface water is 282.31 sq. km., and the net irrigated area stands at 368.43 sq. km. Thus it is clear that surface water accounts for majority of the irrigated land as compared to ground water. The district had 9948 irrigation dugwells, which create an irrigation potential of 143.58 sq.km, out of which 138.24 sq.km. of irrigation potential is utilised. In addition to this 4.40 sq.km, of irrigation potential is utilised through 152 shallow and deep borewells / tubewells.

State government has drilled large number of borewells fitted with hand pumps and electric motors for rural drinking water purposes in the district. In all till March 2007, Government of Maharashtra is operating 6774 successful borewells/tubewells for rural water supply under various schemes in the district, out of which 188 borewells are fitted with electric pumps and the rest 6586 are fitted with hand pumps.

5.0 Ground Water Management Strategy

Ground water has special significance for agricultural development in the district. The ground water development in some parts of the district has resulted in decline of ground water levels. There is thus a need to adopt an integrated approach of development of ground water resources dovetailed with ground water augmentation to provide sustainability to ground water development.

5.1 Ground Water Development

In hard rocks areas which occupy the major part of the district, the future ground water development can be undertaken through dugwells, dug-cum-borewells and dugwells. In the area where thickness of weathering is up to 25m., dug-cum-bore wells may be constructed and in the area where the thickness is more than 25m, tubewells may be constructed. Borewells in the close vicinity of lineaments and fractured zones are likely to give better yield.

The sedimentary formation of the district which constitute 11% of the total area, there is large scope for ground water development through dugwells and tubewells. Tubewells of 90-100 m are likely to yield 5-10 lps. In Alluvial strip towards the southern part of the district along Godavari River shallow tubewells down to a depth of 20-25 m, may give yield of up to 50 m³/hr. However in these parts the water levels are showing declining trends thus future ground water development should be done in these areas with adherence to the precautionary measures, i.e., artificial recharge to augment the ground water resources and adoption of ground water management

practices, so that the sustainable development is achieved.

5.2 Water Conservation and Artificial Recharge

In hard rock area, the artificial recharge structures feasible are check dams, gully plugs, percolation tanks, nalla bunds, etc. The structures like gully plugs, contour bunds are most favourable in the hilly area. Existing dugwells can also be used for artificial recharge, however, the source water should be properly filtered before being put in the wells.

In soft rock areas occupied by Gondwana Sandstone in Sironcha taluka recharge wells/shafts can be constructed as the phreatic aquifer has been partly de-saturated as reflected from pre and postmonsoon water level maps. The dry/unused dugwells/borewells can be also be utilized for artificial recharge with proper precautions i.e., the source water should be non-polluted and presence of filtration mechanism.

These sites need to be located where the hydrogeological conditions are favourable, i.e., where sufficient thickness of unsaturated/de-saturated aquifer exists and water levels are more than 5 m deep in postmonsoon period such areas are observed in southern and south eastern parts of the district occupying parts of Itapalli, Aheri talukas and entire Sironcha taluka.

6.0 Ground Water Related Issues and Problems

The water level trends in soft rock formations occurring in southern parts and hard rock areas of central part are showing declining trends thus future ground water development should be done in these areas with adherence to the precautionary measures, i.e., artificial recharge to augment the ground water resources and adoption of ground water management practices, so that the sustainable development is achieved.

In the district, about 48% samples have nitrate concentration more than MPL and 22.5% water samples have TH concentration more than MPL (>600 mg/L). This indicates that the potability of ground water is mainly affected due to NO₃ and TDS. Continuous intake of high nitrate concentration water causes infant methaemoglobinemia, popularly known as Blue Babies disease. Thus all the wells used for water supply should be first analysed for nitrate as well as other major ions and if the contents are found beyond permissible limit the ground water may be used for other purposes than drinking. Adequate sanitary protection to the wells may be provided to control the nitrate contamination.

7.0 Mass Awareness and Training Activities

7.1 M.A.P. and W.M.T.P.

Till March 2007, one Mass Awareness Programmes (MAP) have been organised in the district at Ranwahi, Taluka-Kurkheda, whereas WMTP (Water Management Training Programme) has been not organised in the district so far. The details are given in **Table-9**.

Table-9: Status of MAP & WMTP (March 2007).

S. No.	Year	Programme	Venue	Date	Participants
1	2003-04	MAP	Ranwahi, Taluka- Kurkheda	26/02/2004	150

8.0 Areas Notified by CGWA/SGWA

Ground water resources were calculated for all 12 talukas from which all talukas have been categorised as “Safe”. Similarly, it was also assessed for all 83 watersheds, out of which 81 have been categorised as “Safe”, and 2 watersheds (WGG 3 & IPNR 0) have been categorised as “Semi Critical”. However, till March 2007 the area has not been notified either by CGWA or SGWA.

9.0 Recommendations

- 1 Major part of the district is underlain by hard rock, where only dugwells are most feasible structures for ground water development. The sites for borewells need to be selected only after proper scientific investigation.
- 2 Borewells generally tap deeper fractures, which may not be sustainable. Besides, the borewells should only be used for drinking water supply and not for irrigation.
- 3 The overall stage of ground water development for the district is only about 8.71%. Therefore, there is scope for further development of ground water resources, in the plain and habitated/un-forested areas.
- 4 The ground water development in the soft rock areas of the district is recommended by constructing tubewells of 90-100 m, with yield of 5-10 lps. Whereas in hard rock areas DCB and borewells can be drilled, wherever the weathered thickness is more than 25 m bgl.
- 5 However, the water level trends in soft rock formations occurring in southern parts and hard rock areas of central part are showing declining trends thus future ground water development should be done in these areas with adherence to the precautionary measures, i.e., artificial recharge to augment the ground water resources and adoption of ground water management practices, so that the sustainable development is achieved
- 6 All the talukas in the district fall in “Safe” Category. So there is a scope for ground water development. However, 2 watersheds (WGG 3 & IPNR 0) have been categorised as “Semi Critical” Therefore, further ground water development is not recommended in these watersheds, without adhering to construction of water conservation and artificial recharge structures.
- 7 The scope exists for construction of suitable artificial recharge structures in the district. The structures recommended for hard rock areas are nala bunds, check dams and KT weirs. The existing dugwells may also be used for artificial recharge of ground water provided source

water is free of silt and dissolved impurities. In soft rock areas occupied by Gondwana sandstone in Sironcha taluka recharge wells/shafts can be constructed as the phreatic aquifer has been partly de-saturated. The dry/unused dugwells/borewells can be also be utilized for artificial recharge with proper precautions i.e., the source water should be non-polluted and presence of filtration mechanism.

- 8 In the district the potability of ground water is mainly affected due to NO_3 and TDS. Continuous intake of high nitrate concentration water causes infant methaemoglobinemia, popularly known as Blue Babies disease. Thus all the wells used for water supply should be first analysed for nitrate as well as other major ions and if the contents are found beyond permissible limit the ground water may be used for other purposes than drinking. Adequate sanitary protection to the wells may be provided to control the nitrate contamination.
- 9 The existing village ponds need to be rejuvenated to act both as water conservation and artificial recharge structures.